



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



Publication number:

**0 651 523 A2**

12

## EUROPEAN PATENT APPLICATION

21 Application number: **94116717.3**

51 Int. Cl.<sup>6</sup>: **H04B 7/26**

22 Date of filing: **23.10.94**

30 Priority: **27.10.93 JP 269206/93**

43 Date of publication of application:  
**03.05.95 Bulletin 95/18**

84 Designated Contracting States:  
**DE FR GB**

71 Applicant: **NEC CORPORATION**  
7-1, Shiba 5-chome  
Minato-ku  
Tokyo (JP)


72 Inventor: **Saegusa, Yashuhiro c/o NEC Corporation**  
7/1, Shiba 5-chome  
Minato-ku, Tokyo (JP)

74 Representative: **Baronetzky, Klaus, Dipl.-Ing. et al**  
Patentanwälte  
Dipl.-Ing. R. Splanemann, Dr. B. Reitzner,  
Dipl.-Ing. K. Baronetzky  
Tal 13  
D-80331 München (DE)

54 **Communication receiver using soft decision to discriminate between a traffic channel frame and a fast associated control channel frame.**

57 In a digital cellular communication system, a cell-site station transmits a frame containing a fixed number of burst signals each having stealing flag bits indicating that the frame is a traffic channel (TCH) or a fast associated control channel (FACCH). A mobile station receives delay-dispersed burst signals and equalizes their delay-dispersal effects to produce soft information so that each of the transmit-

ted stealing flag bit is represented by a multibit value. A channel discriminator provides a total sum of all the multibit values of the received burst signals and compares the sum to a threshold value to identify the received frame as a FACCH if the sum is equal to or greater than the threshold value, or identify it as a TCH if the sum is smaller than the threshold value.

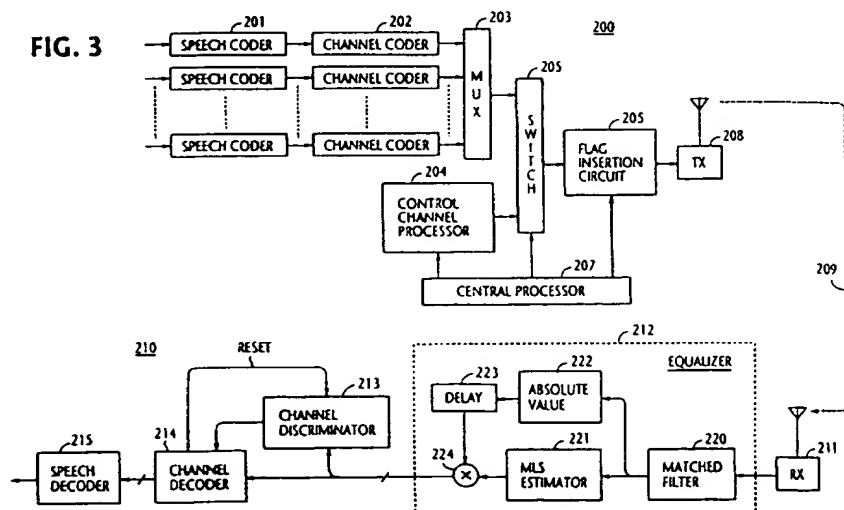

EP 0 651 523 A2

## BACKGROUND OF THE INVENTION

### Field of the Invention

The present invention relates generally to digital cellular communications systems, and more specifically to a channel discrimination technique particularly for use in the European digital cellular telecommunications system (Groupe Special Mobile).

### Description of the Related Art

In the current GSM digital cellular communication system, speech and data bits from a cell-site base station are carried on a traffic channel (TCH) frame, and control bits are carried a fast associated control channel (FACCH) frame which is created by "stealing" part or whole bits of a TCH frame. To enable mobile stations to discriminate between TCH and FACCH frames, stealing flag bits are inserted in predetermined bit positions of each burst of the FACCH frame. On receiving a frame, each mobile station initiates an equalizing process to account for delay-dispersal effects of the transmission path to produce a single bit sequence, and counts the stealing flag bits of the frame contained in the bit sequence. The mobile station then compares the number of stealing flag bits of the frame to a hard decision threshold and determines that the frame is a FACCH if that number is equal to or greater than the threshold; otherwise it determines that the frame is a TCH. Since the equalized signal is of a sequence of bits of single significance each and hence the channel discrimination is based on hard decision comparison, there is a need to increase the resolution of the stealing flag bit count to permit the setting of the threshold to a more precise value.

### SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide an improved channel discrimination technique for a communication system by increasing the resolution of stealing flag bit count by representing each symbol bit with a plurality of bits of different significances.

According to the present invention, a channel discrimination between a traffic channel frame and a fast associated control channel frame is made by (a) receiving a frame containing a fixed number of delay-dispersed burst signals, each burst signal containing information bits and/or control bits, and at least one stealing flag bit indicating the presence or absence of the control bits, (b) equalizing delay-dispersal effects of the burst signals and producing therefrom soft information representing the stealing

flag bit of each burst signal by a multibit value, (c) summing all the multibit values of all the burst signals of the received frame to produce a count value, and (d) comparing the count value to a threshold value to determine that the received frame is the fast associated control channel if the count value is equal to or greater than the threshold value and that the received frame is the traffic channel if the count value is smaller than the threshold value. As a result, the resolution of the count value is increased and soft decision is made for precision discrimination of each frame.

### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be described in further detail with reference to the accompanying drawings, in which:

Fig. 1 is a flowchart of a prior art channel discrimination process used in the GSM cellular communication system;

Figs. 2A to 2G are tables showing computer simulations conducted under different qualities of signal to evaluate the prior art hard decision decoding;

Fig. 3 is a block diagram of a digital cellular communication system in which the present invention is embodied;

Fig. 4 is a block diagram of the channel discriminator of Fig. 3;

Figs. 5A to 5G are parts of a timing diagram associated with the block diagram of Fig. 4;

Fig. 6 is a flowchart of the channel discrimination process of the present invention;

Figs. 7A to 7G are tables showing computer simulations conducted under different qualities of signal to evaluate the soft decision decoding of the present invention; and

Fig. 8 is a comparison table summarizing the best threshold values of the prior art and those of the present invention.

### DETAILED DESCRIPTION

Before proceeding with the detailed description of the present invention, it may prove helpful to provide an explanation of the prior art with reference to the flowchart shown in Fig. 1 and the results of frame discrimination shown in Figs. 2A to 2G using computer simulations based on hard decision decoding. According to the GSM digital cellular telecommunications system, convolutional error correction coding is used to distribute transmitted information over time such that it can still be reconstructed; despite some corruption and an error correction decoding technique, such as Viterbi algorithm channel decoding, is used to reconstruct the originally-transmitted information from the cor-

rupted signal. On a downlink path (base-to-mobile), the coded signals are transmitted as a frame sequence with each frame consisting of eight successive bursts of 116 bits each. When a cell-site base station needs to transmit high speed control data, it "steals" part or whole of a traffic channel (TCH) and transmits the control data on the stolen channel which is called a fast associated control channel (FACCH). In a system where a full-rate FACCH frames is used, it is created by stealing whole bits of eight bursts of a frame and setting stealing flag bits  $hu = 1$  and  $hl = 1$  into the 57th and 58th bit locations of each of these bursts. Whereas, in a system in which a half-rate FACCH frame is used, it is created by stealing all the even numbered bits of a burst and setting flag bits  $hl = 0$ ,  $hu = 1$  in the burst, or stealing all the odd numbered bits of a burst and setting flag bits  $hl = 1$  and  $hu = 0$  in the burst. Due to interleaving at four-burst intervals, the half-rate FACCH frame comprises all the even numbered bits of the second four bursts of a non-interleaved frame and all the odd numbered bits of the first four bursts of a subsequent non-interleaved frame. If the whole of a channel is used to carry traffic, both of the stealing flag bits "hl" and "hu" are set to 0.

The equalization technique currently employed in the GSM system is one that yields a single bit sequence on which hard decisions are made to discriminate between TCH and FACCH frames. As illustrated in Fig. 1, the prior art channel discrimination process at a mobile receiver begins with initialization step 100 which sets the burst number  $N$  to 0. At step 101, a burst is received. If the burst number  $N$  is 0 (step 102), stealing flag bit count variable  $FA$  is set equal to 0 (step 103) and if  $N = 4$  (step 104), stealing flag bit count variable  $FB$  is set equal to 0 (step 105). If  $N = 0, 1, 2$  or  $3$  (step 106), variable  $FA$  is incremented by 1 or 0 depending on the value of stealing flag bit "hu" and variable  $FB$  is incremented by 1 or 0 depending on the value of stealing flag bit "hl" (step 107). If  $N = 4, 5, 6$  or  $7$  (step 108), variable  $FA$  is incremented by 1 or 0 depending on the value of stealing flag bit "hl" and variable  $FB$  is incremented by 1 or 0 depending on the value of stealing flag bit "hu" (step 109). If  $N$  is other than 7 or 3 (steps 110, 114), the burst number  $N$  is incremented by 1 at step 113 and control returns to step 101 to repeat the process on the next burst.

Accordingly, in a system where the full-rate FACCH frame is employed, the flag variable  $FA$  which has been incremented to  $FA = 3$  by flag bit "hu" during the first four bursts of the current frame is successively incremented to  $FA = 7$  by flag bit "hl" during the second four bursts of the current frame. On the other hand, in a system where the half-rate FACCH frame is used, the flag

variable  $FB$  which has been incremented by the flag bit "hu" to  $FB = 3$  during the second four bursts of a previous frame is successively incremented to  $FB = 7$  by the flag bit "hl" during the first four bursts of a subsequent frame.

If  $N = 7$  (step 110), the variable  $FA$  is compared to a fixed threshold value 5 (step 111). If  $FA \geq 5$ , the frame of interest is identified as a FACCH frame (step 112), and if  $FA < 5$ , it is identified as a TCH frame (step 116). If  $N$  is 3 (step 114), then the variable  $FB$  is compared to the threshold value 5 (step 115). If  $FB \geq 5$ , the frame of interest is identified as a FACCH frame (step 112), and if  $FB < 5$ , it is identified as a TCH frame. Following steps 112, 116, variable  $N$  is incremented by 1 according to modulo 8 addition. Thus, if  $N$  becomes equal to 8, it is set equal to 0.

Since eight bursts exist in each frame, each of the stealing flag bit count values  $FA$  and  $FB$  of the frame is in the range between 0 and 8, with the 0 corresponding to the worst case in which all the stealing flag bits are corrupted and the 8 corresponding to the most favorable case in which all the stealing bits are correctly received. The threshold value 5 is currently chosen as an optimum value. It will be seen that if the threshold is set at a relatively lower value of the control range, the ratio of frames identified as a fast associated control channel increases, while the ratio of frames identified as a traffic channel decreases. One important factor for the optimum threshold determination is that the ratio of the number detected FACCH frames to the total number of received frames should be as high as possible and as close as possible to the ratio of the number of detected TCH frames to the total number of received frames. Another important factor is the frame difference value between the number of detected TCH frames and the number of detected FACCH frames. Therefore, the best threshold is one that gives high and equal discrimination ratios for both types of channel and a minimum frame difference value. Accordingly, threshold values must be evaluated using different qualities of transmitted signal and the best threshold is chosen to meet such requirements.

Computer simulations for a total of 1,999 frames under different signal to noise environments (-6 dB to 0 dB) using the hard decision threshold values (1 to 8) show that the best threshold value for each noise environment (white Gaussian noise) is one that provides a minimum of the absolute values of the frame difference value between the number of detected TCH frames and the number of detected FACCH frames as indicated by asterisks. It is shown that the threshold value of 5 is not the best for all S/N ratios. Additionally, it is found that the difference values for the best threshold is not

necessarily optimum. They take on substantial values as indicated in Figs. 2A to 2G, e.g., 162, 115, 73 and 42 for S/N ratios -6 dB, -5 dB, -4 dB and -3 dB, respectively.

Referring now to Fig. 3, there is shown a downlink system of a GSM digital cellular communication system of the present invention. The downlink system comprises a cell-site transmitter 200 and a mobile unit 210. At the cell-site station, the transmission rate of speech signals is converted to a low rate such as 4.8 kbps by known speech coders 201 and then converted in channel coders 202 to convolutional codes using the known convolutional error correction coding technique to distribute transmitted information over time such that it can still be reconstructed, despite some corruption. The code bits of four bursts are organized into a frame are then reordered and interleaved according to the GSM channel coding standard to produce a frame of eight bursts. The eight-burst frame that carries traffic is called the traffic channel. Some of the traffic channel frames are stolen by signaling information and stealing flag bits are inserted into each burst of the stolen frames. These operations are performed by multiplexer 203, control channel processor 204, switch 205, flag insertion block 206 and central processor 207. The output of flag insertion circuit 206 is converted to a radio frequency and transmitted from transmitter 208 through a frequency-selective fading channel 209.

The mobile unit 210 includes a receiver 211, an equalizer 212, a channel discriminator 213, a channel decoder 214, and a speech decoder 215. The receiver 211 has radio frequency, intermediate frequency and demodulation stages. Equalizer 212 can be of any known design. A suitable equalizer is disclosed in international patent application published under WO/91/06165. Equalizer 212 comprises a matched filter 220 and a maximum likelihood estimator 221. A radio frequency digital signal exhibiting delay-spread characteristics is received, converted to an intermediate frequency and demodulated into  $n$  samples per symbol. The matched filter 220 is matched to the multipath channel characteristics. The MLSE 221 makes one-symbol-at-a-time decisions on the symbol received. The absolute value of the matched filter output is taken by an absolute value converter 222 as a measure of reliability for each of the MLSE's decisions and delayed by a delay element 223 to account for the processing time of the MLSE. The MLSE's decisions are weighted by a multiplier 224 with the delayed absolute value to provide soft information in which each symbol bit is represented by a triad of different significant bits indicating a measure of reliability of the symbol bit, with the most significant bit of the triad corresponding to

the bit used in the prior art hard decision decoding. Therefore, the stealing flag bits "hl" and "hu" are each represented by three bits of different significances, on which better channel discrimination can be made in the channel discriminator 213. The equalizer produces a total of  $116 \times 3$  bits for each burst, which is supplied in the form of three parallel bit sequences #0, #1 and #2 corresponding to the least, medium and most significant binary values, respectively.

As illustrated in Fig. 4, the channel discriminator 213 of the present invention comprises a burst detector 330 for detecting each burst of downlink frames. A burst counter 331 counts the number of detected bursts and produces a burst count value BC. A timing pulse generator 332 is also responsive to the detected burst for producing various timing signals including latch command pulses HL, HU for latching stealing flags, an add command pulse L, reset pulses RA, RB and an enable pulse EBL. The timing diagram of these pulses is illustrated in Figs. 5A, 5B and 5C.

An error bit detector 340 is provided for evaluating the equalizer output to detect error bits to produce a signal representative of the signal-to-noise ratio of the received signal. A translation table 341 is connected to the error detector 340 for transforming the S/N ratio to a corresponding 6-bit threshold value Th.

A pair of 3-bit latches 300 and 310 is connected to the equalizer output for extracting stealing flags "hl(k)" and "hu(k)" from the bit sequences #0, #1, #2 in response to the latch command pulses HL and HU, respectively (where  $k = 0, 1, 2$  corresponding to the least, medium and most significances, respectively). The output of 3-bit latch 300 is connected to the first inputs of selectors 301 and 311 and the output of 3-bit latch 310 is connected to the second inputs of selectors 301 and 311. As a control signal the burst count value BC is applied to these selectors. Each of these selectors utilizes the burst count BC to select the output of latch 300 if  $BC = 0, 1, 2$  or 3, or the output of latch 310 if  $BC = 4, 5, 6$  or 7.

A flag counter 306 is responsive to the output of the selector 301. This counter comprises a 6-bit adder 302 and 6-bit latches 303, 304. Latch 303 is reset to zero in response to the reset pulse RA that occurs when  $BC = 0$  and activated by the latch command pulse L following the latch pulses HL, HU in order to store a 6-bit sum provided by the adder 302. Latch 304 responds to a clock pulse of phase  $\phi 1$  from clock source 333 by latching the output of latch 303 for coupling to adder 302 to be summed with the output of selector 301. The flag counter 306 produces a 6-bit output which represents the total number of stealing flag bits of either hl(k) or hu(k) received in the eight bursts of a

frame.

Likewise, a flag counter 316 is provided for counting the output of selector 311, using a 6-bit adder 312 and 6-bit latches 313, 314, which correspond respectively to the adder 302, latches 303, 304, mentioned above. Flag counter 316 differs from flag counter 306 in that latch 313 is reset to zero in response to the reset pulse RB when BC = 4. Flag counter 316 produces a 6-bit output representing the total number of stealing flag bits hu(k) received during the second four bursts (BC = 4, 5, 6 or 7) of a given frame plus the total number of stealing flag bits hl(k) received during the first four bursts (BC = 0, 1, 2, or 3) of a subsequent frame.

The 6-bit output of flag counter 306 is compared to the 6-bit threshold value Th by means of a comparator 305, and the 6-bit output of flag counter 316 is compared to the 6-bit threshold value Th by means of a comparator 315. If the output of each flag counter is equal to or greater than the threshold, each comparator produces a 1 indicating that the current frame is a fast associated control channel, otherwise it produces a 0 indicating that the current frame is a traffic channel.

A selector 320 selects one of the outputs of comparators 305, 315 in accordance with the burst count VC. If BC = 0, 1, 2 or 3, the comparator 305 output is selected and applied to an AND gate 321 and if BC = 4, 5, 6 or 7, the comparator 315 output is selected for coupling to the AND gate. AND gate 321 is enabled in response to the enable pulse EBL to pass the selector 320 output to the set input of a flip-flop 322 where it is latched by a clock pulse of phase  $\phi_2$  for application to the channel decoder 214.

Channel decoder 214 utilizes the output of channel discriminator 213 to initiate a channel decoding process that is particular to each of the incoming frames according to their channel types, and provides a reset pulse to the channel discriminator 213 when the decoding process is complete for a frame. In response to this reset pulse, the flip-flop 322 is initialized.

The present invention is also implemented by a software program as shown in Fig. 6. The channel discrimination process at a mobile receiver begins with initialization step 400 to set the burst number N to 0. When a burst is received (step 401), the burst number N is checked for equality to 0 (step 402). If N = 0, a 6-bit stealing flag bit count variable FA is set equal to 0 (step 403) and if N = 4 (step 404), a 6-bit stealing flag bit count variable FB is set equal to 0 (step 405). If N = 0, 1, 2 or 3 (step 406), variable FA is incremented by an amount corresponding to the three stealing flag bits hu(0, 1, 2) and variable FB is incremented by an amount corresponding to the three stealing flag bits hl(0, 1, 2) at step 407. If N = 4, 5, 6 or 7 (step

408), variable FA is incremented by stealing flag bits hl(0, 1, 2) and variable FB is incremented by stealing flag bits hu(0, 1, 2) at step 409. If N is other than 7 or 3 (steps 410, 414), the burst number N is incremented by 1 at step 413 and control returns to step 401 to repeat the process on the next burst.

If N = 7 (step 410), the variable FA is compared to the 6-bit threshold value Th (step 411). If  $FA \geq Th$ , the frame of interest is identified as a FACCH frame (step 412), and if  $FA < Th$ , it is identified as a TCH frame (step 416). If N is 3 (step 414), then the variable FB is compared to the threshold value Th (step 415). If  $FB \geq Th$ , the frame of interest is identified as a FACCH frame (step 412), and if  $FB < Th$ , it is identified as a TCH frame. Following steps 412, 416, variable N is incremented by 1 according to modulo 8 addition.

Computer simulations were conducted for a total of 1,999 frames under different signal to noise environments (-6 dB to 0 dB) using 6-bit soft decision threshold values in the range between 0 and 56. As indicated in Figs. 7A to 7G, the simulations show that the best threshold value for each noise environment (white Gaussian noise) provides a minimum of the absolute values of the frame difference value between the number of detected speech channel (TCH) frames and the number of detected FACCH frames as indicated by asterisks. For example, with a threshold value of 28 in an environment of S/N = -6 dB the frame difference value of the present invention is 2 (see Fig. 7A), which favorably compares with the frame difference value is 142 of the prior art hard decision decoding using the threshold value of 4 under the same S/N environment (Fig. 2A). In addition, Fig. 7A shows that the ratios of detected frames for both TCH and FACCH are high and equal to each other. The same tendencies exist for other S/N ratios as is apparent from Figs. 7B to 7G. For purposes of comparison, the best threshold values of the present invention and the best threshold values of the prior art are summarized in Fig. 8.

Since the threshold value Th is variable as a function of the quality of the received signal, the threshold value is adaptively optimized for a particular level of signal quality.

## Claims

1. A method of channel discrimination between a traffic channel frame and a fast associated control channel frame, comprising the steps of:
  - a) receiving a frame containing a fixed number of delay-dispersed burst signals, each burst signal containing information bits and/or control bits, and at least one stealing flag bit indicating the presence or absence

of the control bits;

b) equalizing delay-dispersal effects of the burst signals and producing therefrom soft information representing the stealing flag bit of each burst signal by a multibit value;

c) summing all the multibit values of all the burst signals of the received frame to produce a count value; and

d) comparing said count value to a threshold value to determine that the received frame is the fast associated control channel frame if the count value is equal to or greater than the threshold value and that the received frame is the traffic channel frame if the count value is smaller than the threshold value.

2. A method as claimed in claim 1, further comprising the steps of:

detecting the quality of the received frame;

and

varying the threshold value in accordance with the detected quality.

3. A communication receiver comprising:

means (211) for receiving a frame containing a fixed number of delay-dispersed burst signals, each burst signal containing information bits and/or control bits, and at least one stealing flag bit indicating the presence or absence of the control bits;

means (212) for equalizing delay-dispersal effects of the burst signals and producing therefrom soft information representing the stealing flag bit of each burst signal by a multibit value;

means (306; 316) for summing all the multibit values of all the burst signals of the received frame to produce a count value; and

means (305; 315) for comparing said count value to a threshold value to determine that the received frame is a fast associated control channel if the count value is equal to or greater than the threshold value and that the received frame is a traffic channel if the count value is smaller than the threshold value.

4. A communication receiver as claimed in claim 1, further comprising:

means (340) for detecting the quality of the received frame; and

means (341) for varying said threshold value according to the detected quality.

5. A soft decision channel discriminator for a communication receiver which receives a frame containing a fixed number of delay-dispersed burst signals each containing informa-

tion bits and/or control bits, and at least one stealing flag bit indicating the presence or absence of the control bits, and equalizes delay-dispersal effects of the burst signals to produce soft information representing the stealing flag bit of each burst signal by a multibit value, the discrimination circuit comprising:

means (306; 316) for summing all the multibit values of all the burst signals of the received frame to produce a count value; and


means (305; 315) for comparing said count value to a threshold value to determine that the received frame is a fast associated control channel if the count value is equal to or greater than the threshold value and that the received frame is a traffic channel if the count value is smaller than the threshold value.

6. A soft decision channel discriminator as claimed in claim 5, further comprising:

means (340) for detecting the quality of the received frame; and

means (341) for varying said threshold value according to the detected quality.

FIG. 1 PRIOR ART

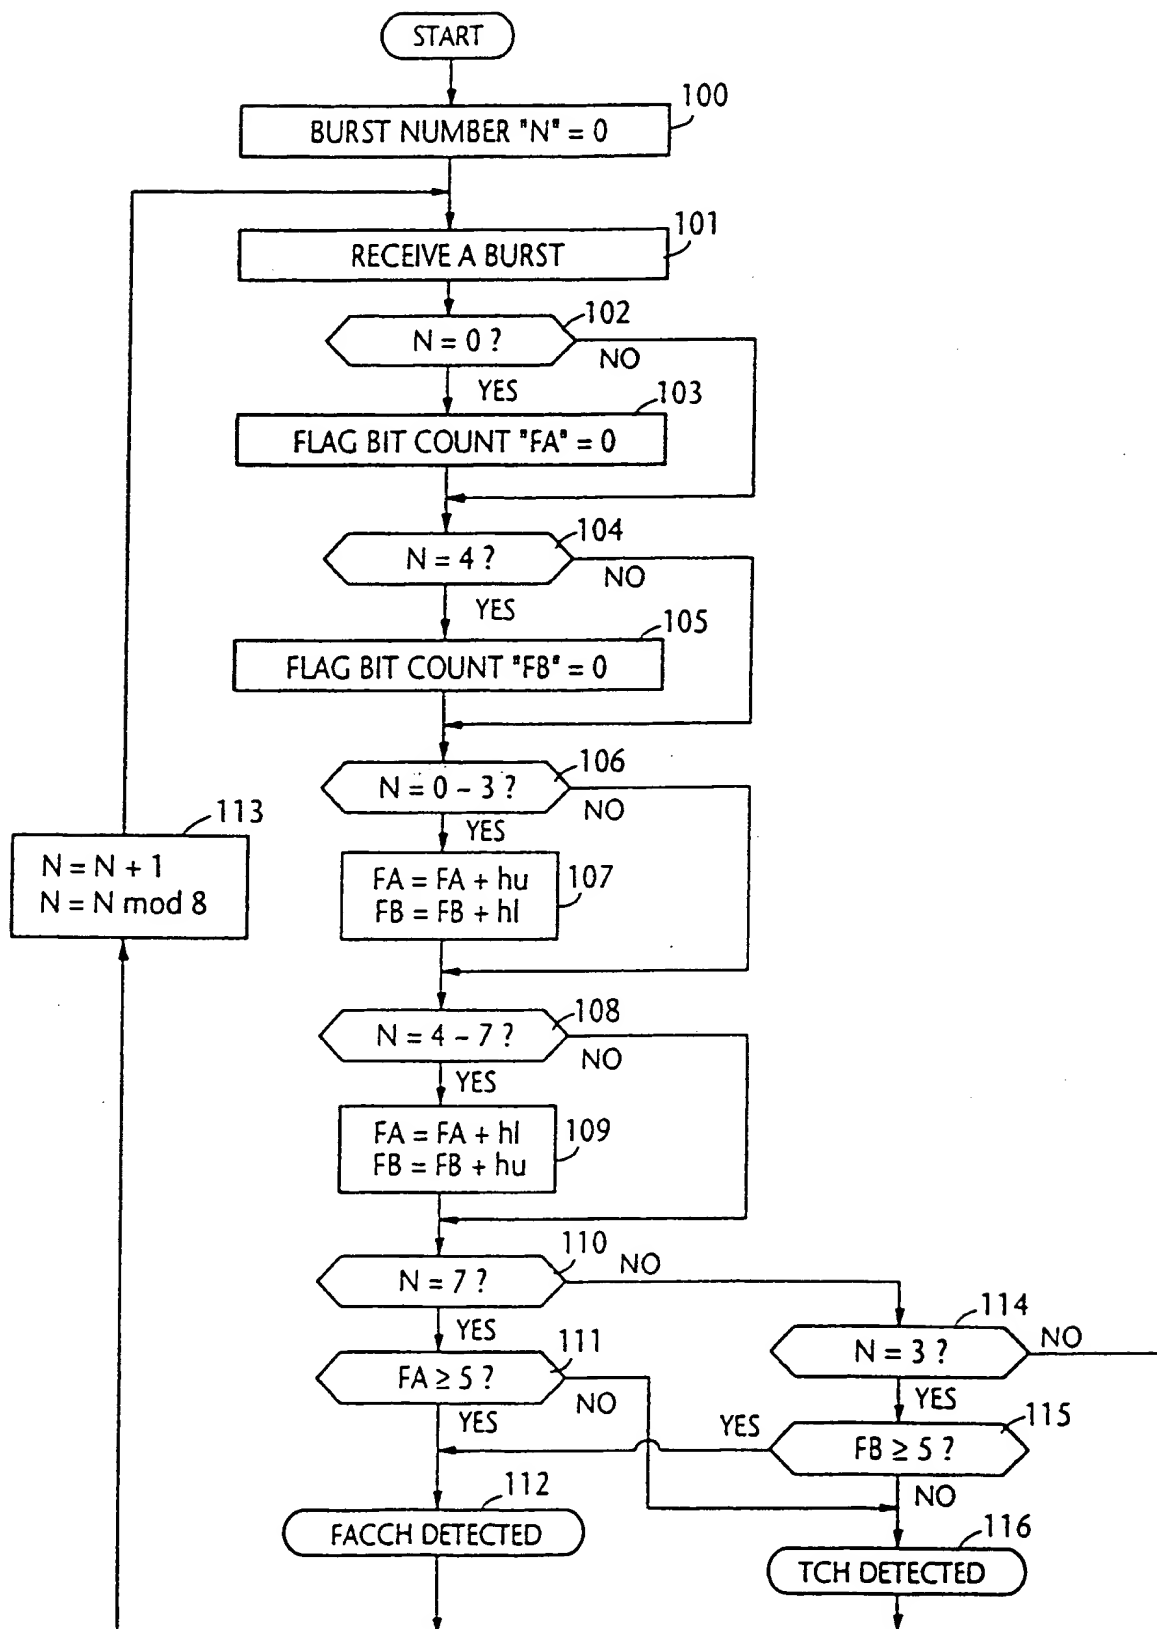

**THIS PAGE BLANK (USPTO)**



# FIG. 2A

## PRIOR ART

S/N = - 6 dB

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
1	11.8 %	236	100.0 %	1,999	1,763
2	38.9 %	778	99.9 %	1,998	1,220
3	69.0 %	1,379	99.4 %	1,988	609
4	89.0 %	1,379	97.1 %	1,941	142
* 5	97.4 %	1,948	89.3 %	1,786	162
6	99.6 %	1,991	69.9 %	1,397	594
7	100.0 %	1,999	40.3 %	805	1,194
8	100.0 %	1,999	11.7 %	233	1,766

LEGEND: A = NO. OF DETECTED TCH FRAMES  
B = NO. OF DETECTED FACCH FRAMES

# FIG. 2B

## PRIOR ART

S/N = - 5 dB

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
1	12.7 %	254	100.0 %	1,999	1,745
2	40.4 %	807	99.9 %	1,998	1,191
3	70.4 %	1,40	99.7 %	1,993	585
4	90.7 %	1,813	98.4 %	1,967	154
* 5	97.7 %	1,954	92.0 %	1,839	115
6	99.6 %	1,992	76.2 %	1,523	469
7	100.0 %	1,999	46.7 %	933	1,066
8	100.0 %	1,999	15.1 %	301	1,698

# FIG. 2C

## PRIOR ART

S/N = - 4 dB

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
1	18.9 %	378	100.0 %	1,999	1,621
2	53.4 %	1,068	100.0 %	1,998	931
3	81.7 %	1,634	99.9 %	1,998	364
* 4	95.5 %	1,910	99.2 %	1,983	73
5	99.2 %	1,983	94.1 %	1,882	101
6	99.9 %	1,998	81.6 %	1,632	366
7	100.0 %	1,999	54.8 %	1,096	903
8	100.0 %	1,999	19.3 %	386	1,613

LEGEND: A = NO. OF DETECTED TCH FRAMES  
B = NO. OF DETECTED FACCH FRAMES

# FIG. 2D

## PRIOR ART

S/N = - 3 dB

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
1	24.9 %	498	100.0 %	1,999	1,501
2	62.5 %	1,249	100.0 %	1,999	750
3	87.4 %	1,748	100.0 %	1,999	251
* 4	90.7 %	1,951	99.7 %	1,993	42
5	99.5 %	1,989	96.5 %	1,930	59
6	100.0 %	1,999	86.9 %	1,738	261
7	100.0 %	1,999	63.0 %	1,259	740
8	100.0 %	1,999	24.7 %	493	1,506

**FIG. 2E**  
**PRIOR ART**

S/N = - 2 dB

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
1	32.0 %	639	100.0 %	1,999	1,360
2	71.9 %	1,438	100.0 %	1,999	561
3	92.5 %	1,850	100.0 %	1,999	149
4	98.8 %	1,976	99.9 %	1,998	22
* 5	99.8 %	1,996	99.8 %	1,995	1
6	100.0 %	1,999	97.9 %	1,958	41
7	100.0 %	1,999	86.6 %	1,731	268
8	100.0 %	1,999	52.2 %	1,043	956

LEGEND: A = NO. OF DETECTED TCH FRAMES  
B = NO. OF DETECTED FACCH FRAMES

**FIG. 2F**  
**PRIOR ART**

S/N = - 1 dB

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
1	41.0 %	819	100.0 %	1,999	1,180
2	80.2 %	1,604	100.0 %	1,999	395
3	95.5 %	1,910	100.0 %	1,999	89
4	99.3 %	1,985	99.9 %	1,997	12
* 5	99.8 %	1,996	99.4 %	1,987	9
6	100.0 %	1,999	95.6 %	1,911	88
7	100.0 %	1,999	79.3 %	1,586	413
8	100.0 %	1,999	41.3 %	825	1,174


# **FIG. 2G** **PRIOR ART**

S/N = 0 dB

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
1	52.4 %	1,048	100.0 %	1,999	951
2	87.4 %	1,747	100.0 %	1,999	252
3	98.0 %	1,960	100.0 %	1,999	39
4	99.7 %	1,994	99.9 %	1,998	4
* 5	99.9 %	1,998	99.8 %	1,995	3
6	100.0 %	1,999	97.9 %	1,958	14
7	100.0 %	1,999	86.6 %	1,731	268
8	100.0 %	1,999	52.2 %	1,043	956

LEGEND: A = NO. OF DETECTED TCH FRAMES  
B = NO. OF DETECTED FACCH FRAMES

FIG. 3

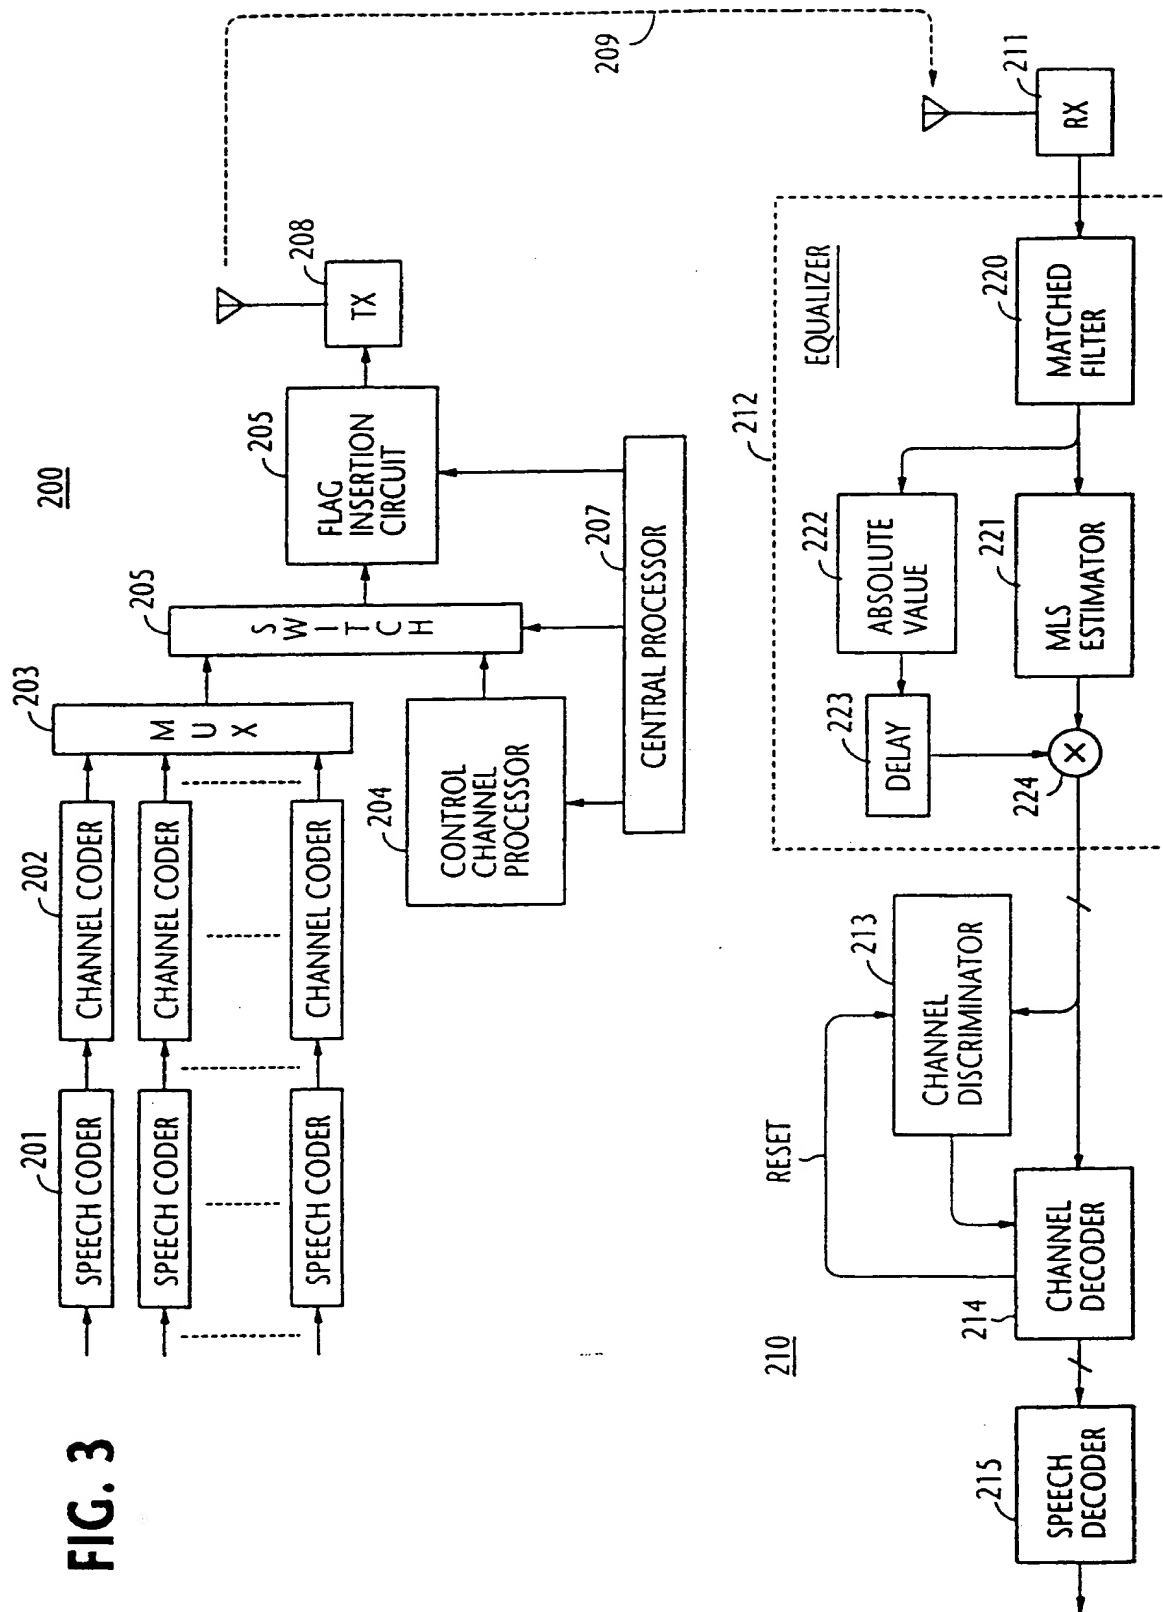

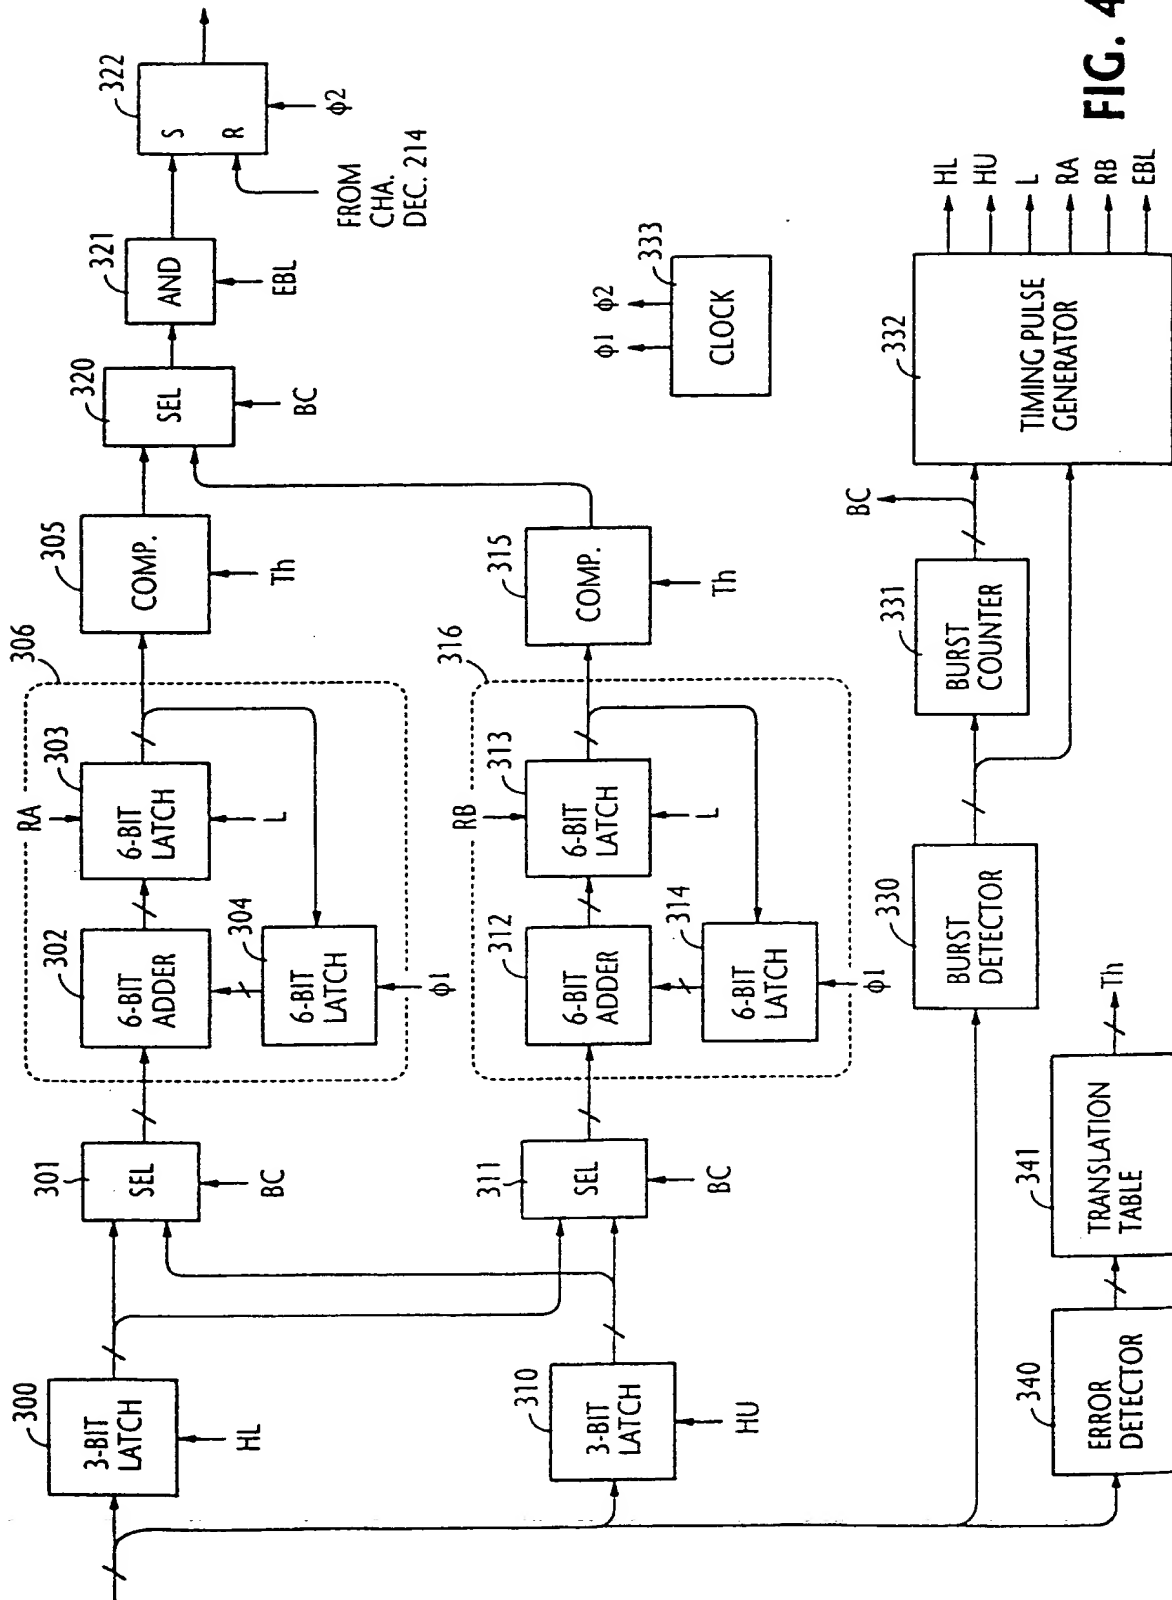


FIG. 4

FIG. 5A

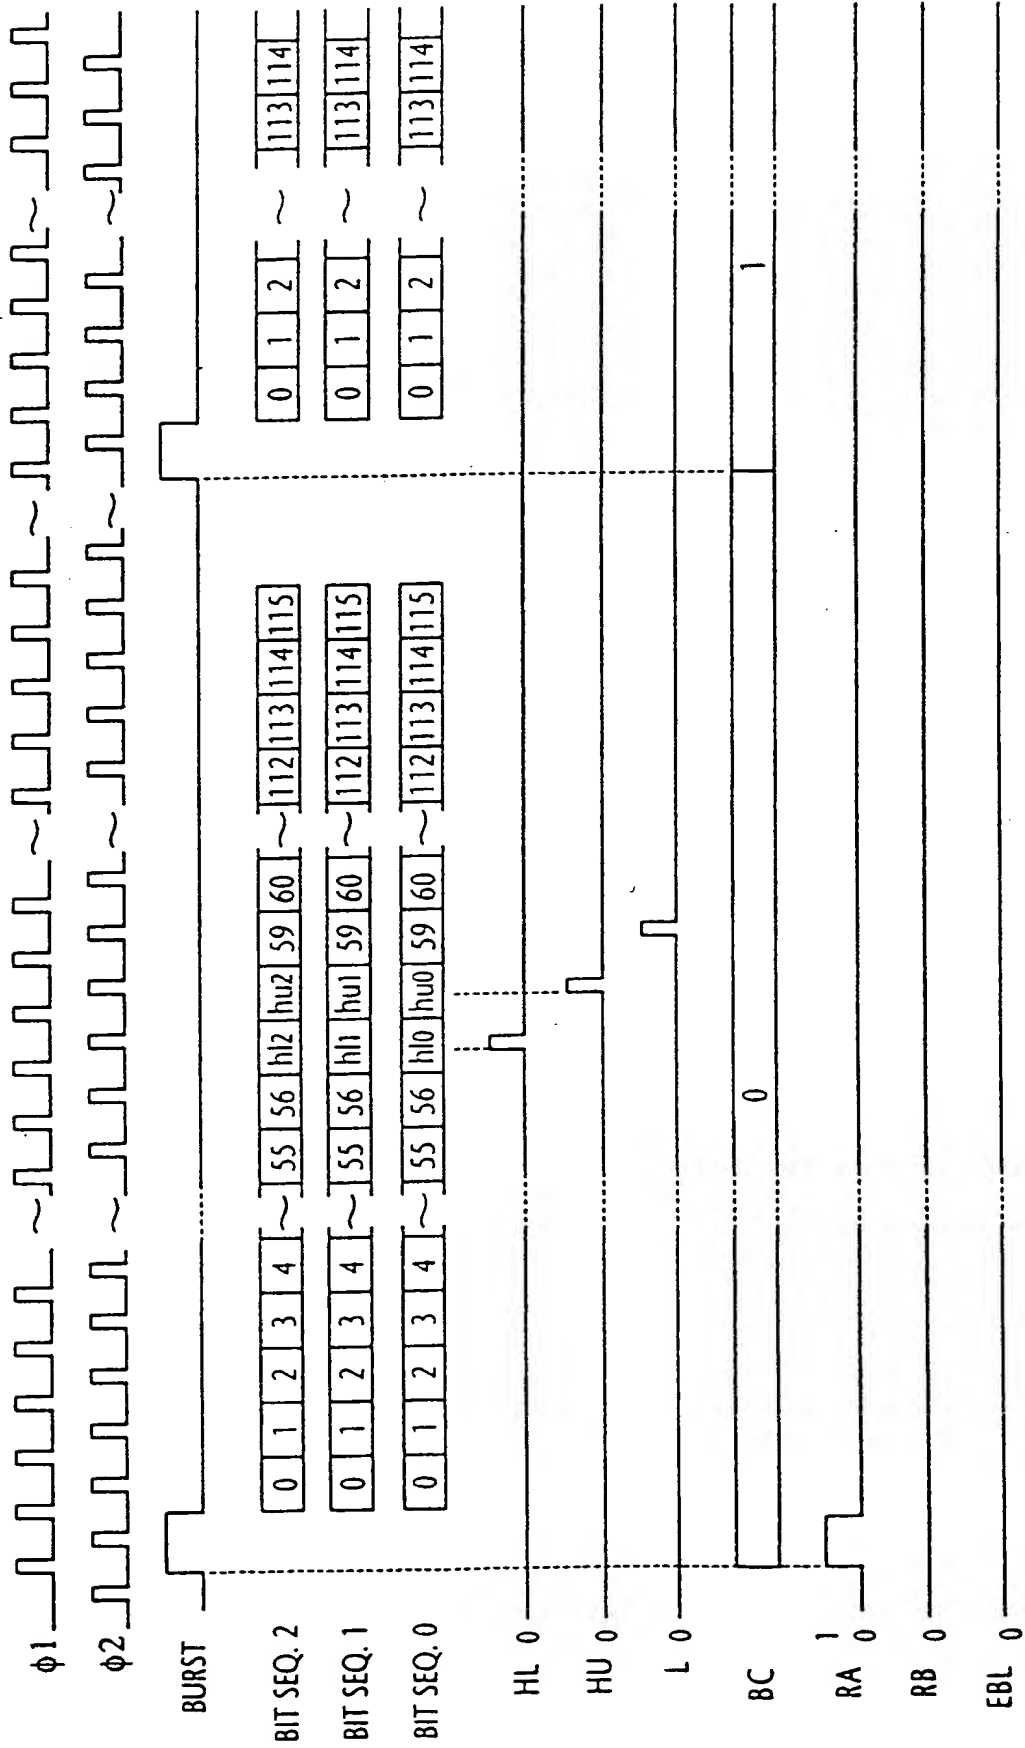


FIG. 5B

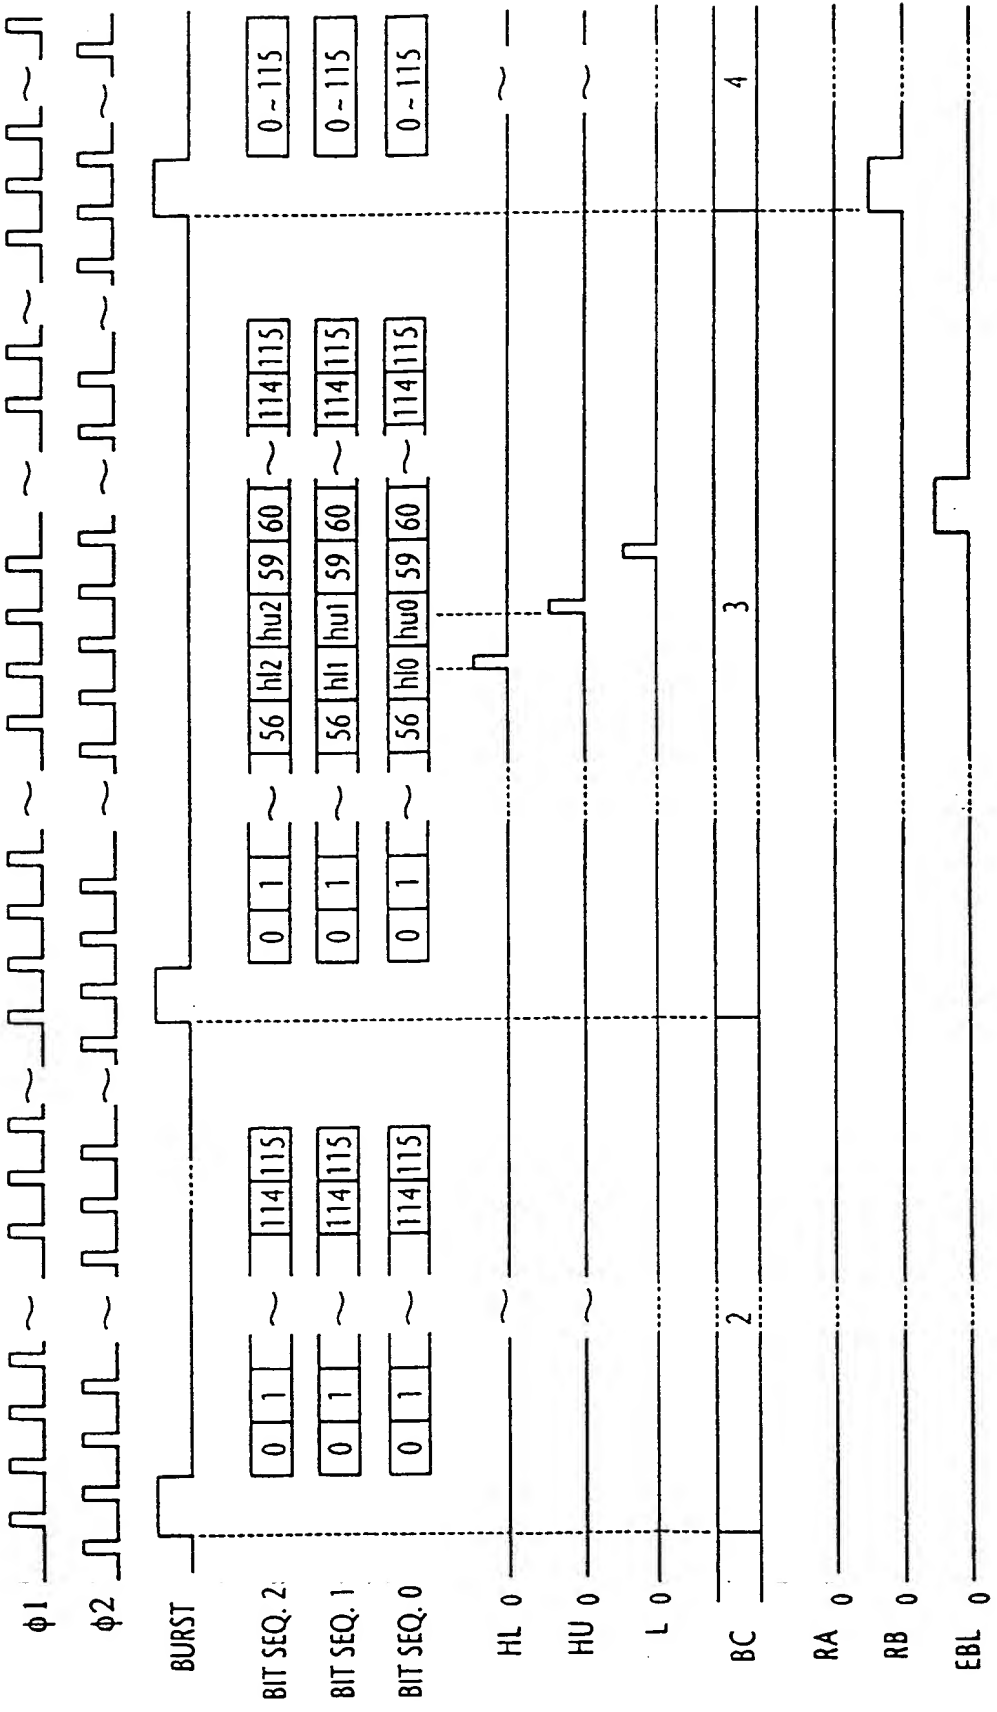




FIG. 5C

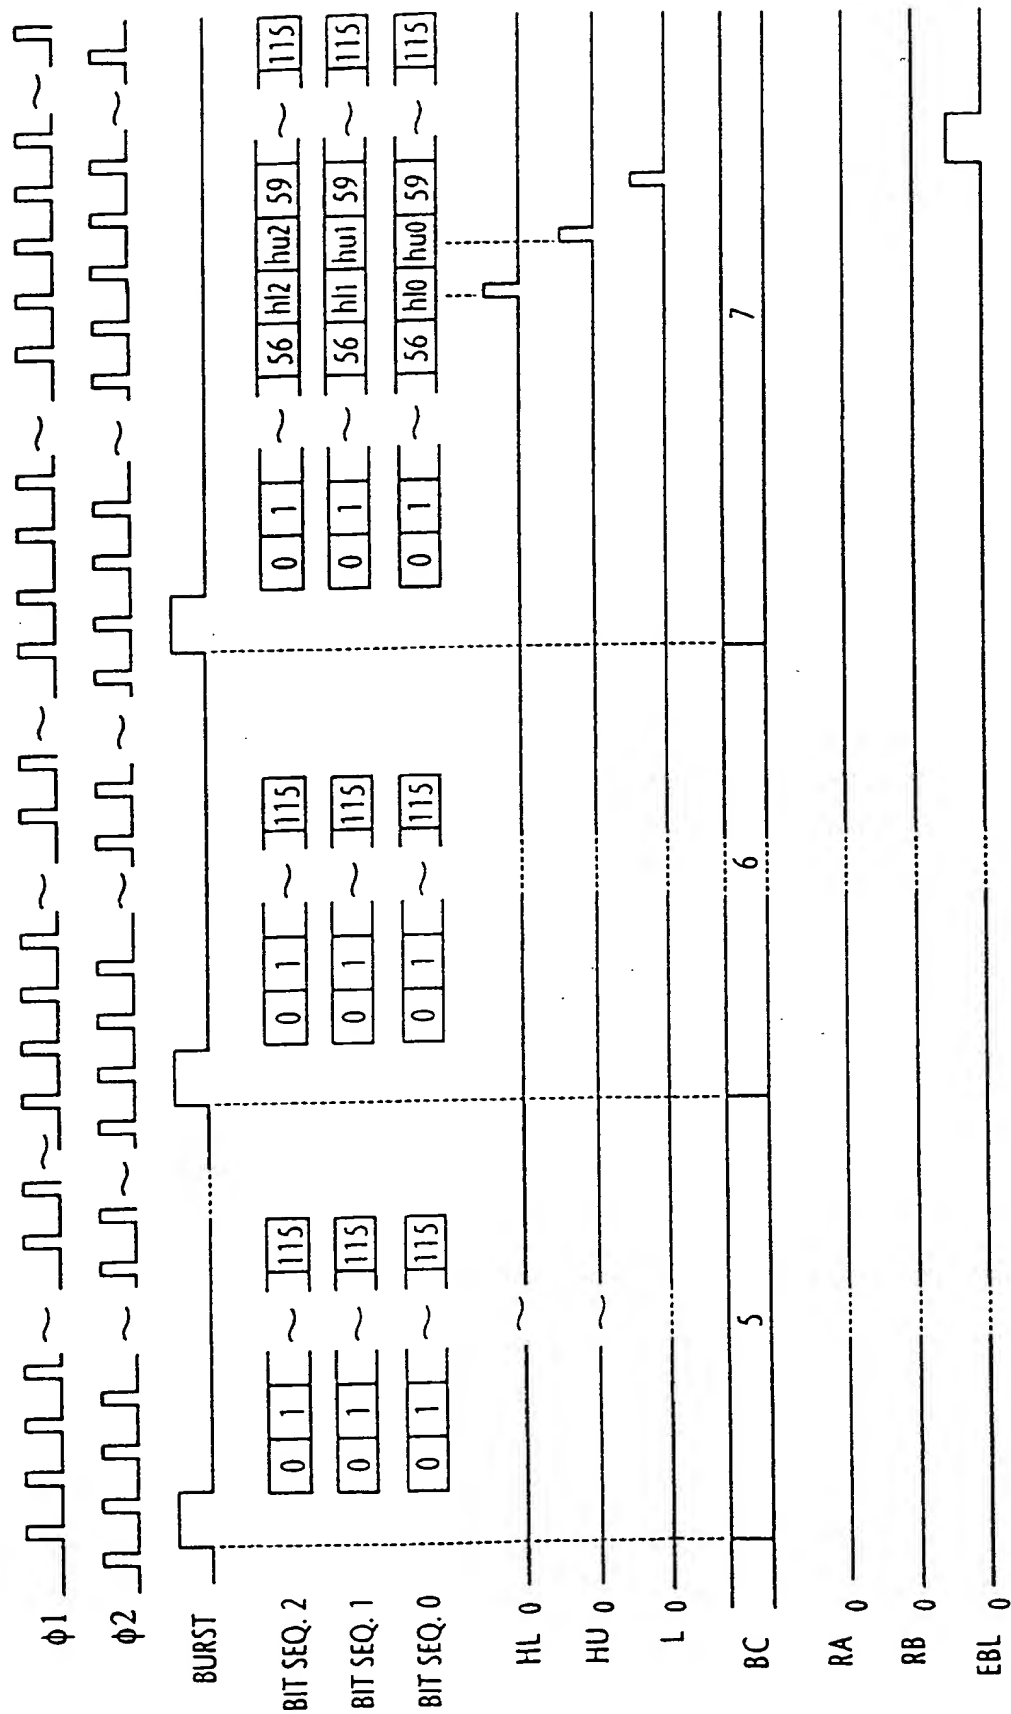
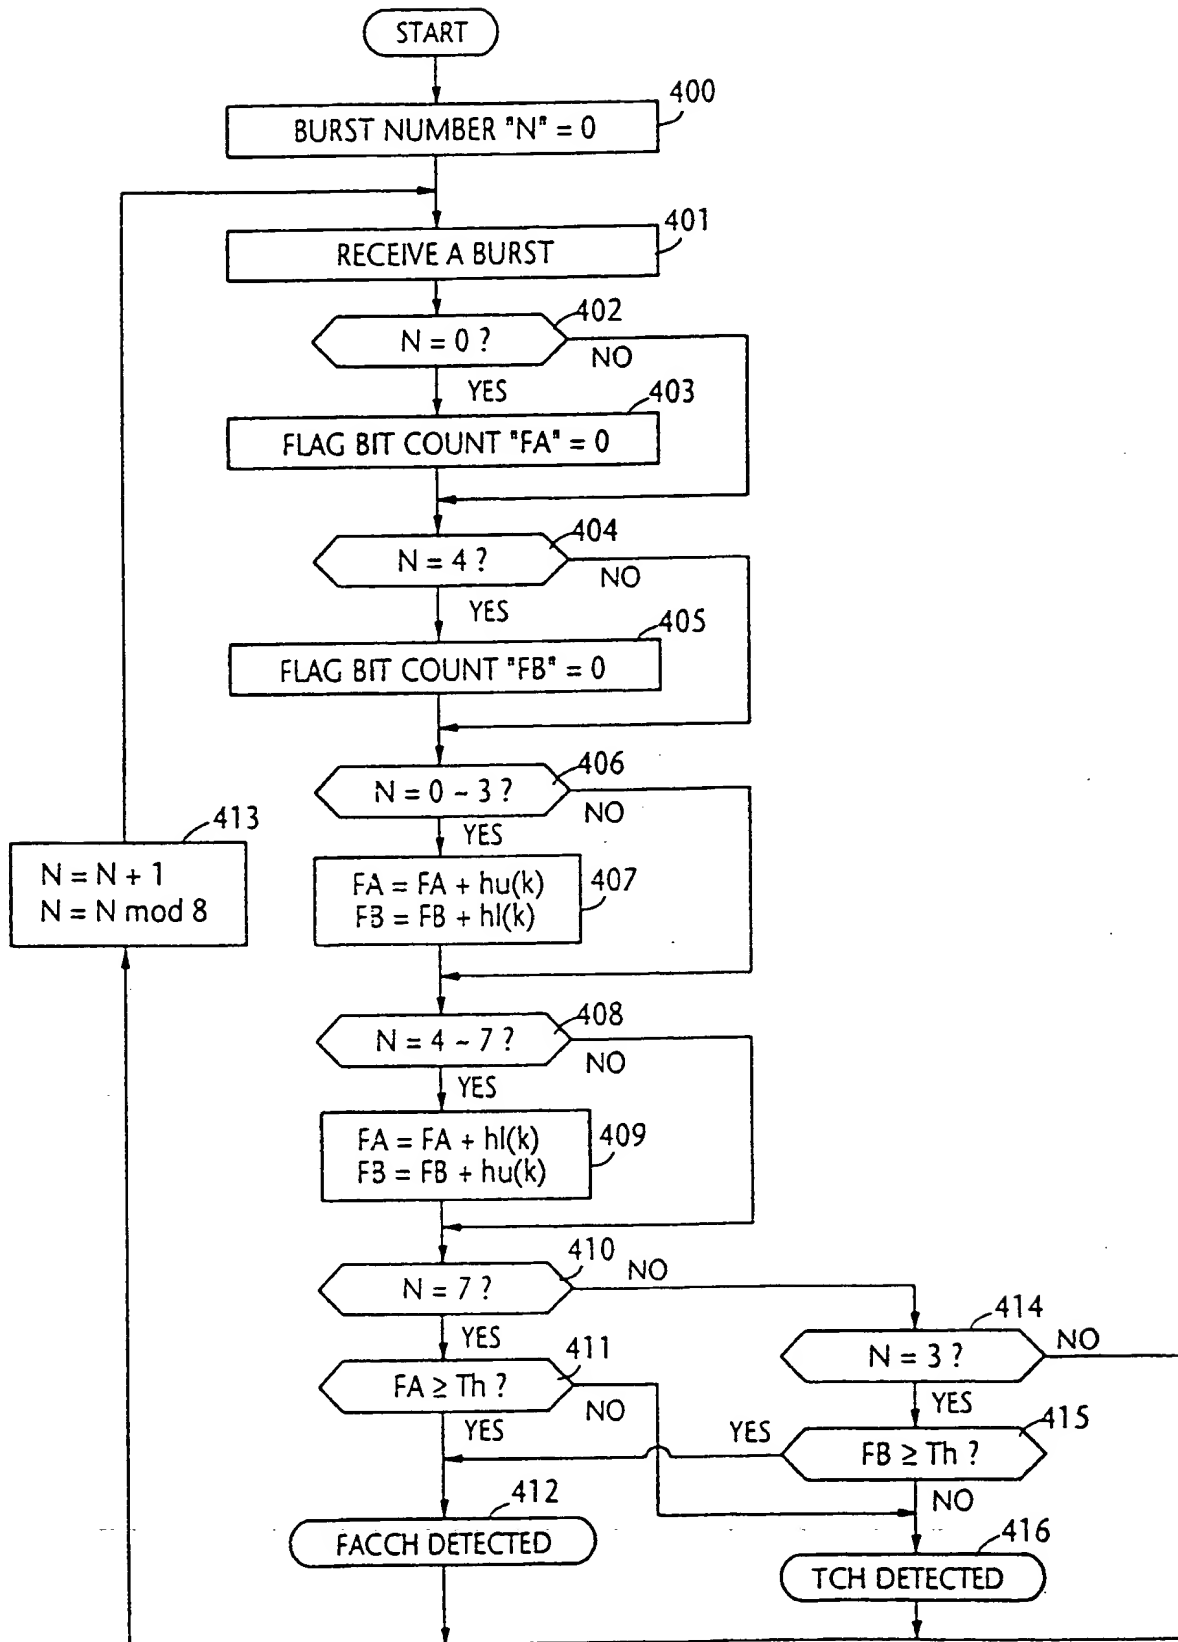


FIG. 6



**FIG. 7A**

S/N = - 6 dB

LEGEND: A = NO. OF DETECTED TCH FRAMES  
B = NO. OF DETECTED FACCH FRAMES

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
7	13.9 %	278	100.0 %	1,999	1,721
14	48.4 %	967	99.9 %	1,998	1,031
21	80.8 %	1,616	99.7 %	1,993	377
22	84.6 %	1,692	99.4 %	1,988	296
23	87.4 %	1,747	99.0 %	1,980	233
24	90.3 %	1,806	98.6 %	1,971	165
25	92.2 %	1,844	98.2 %	1,963	119
26	93.6 %	1,871	97.6 %	1,952	81
27	95.1 %	1,901	97.2 %	1,944	43
* 28	96.2 %	1,924	96.3 %	1,926	2
29	97.2 %	1,943	95.1 %	1,901	42
30	97.7 %	1,953	93.6 %	1,872	81
31	98.3 %	1,965	92.2 %	1,843	122
32	98.8 %	1,976	90.3 %	1,805	171
33	99.1 %	1,982	88.3 %	1,766	216
34	99.3 %	1,986	86.5 %	1,730	256
35	99.6 %	1,991	84.1 %	1,681	310
36	99.7 %	1,994	81.2 %	1,623	371
37	99.7 %	1,994	77.9 %	1,557	437
38	99.8 %	1,996	73.7 %	1,474	522
39	99.9 %	1,997	68.3 %	1,366	631
40	99.9 %	1,998	63.8 %	1,276	722
41	100.0 %	1,999	59.4 %	1,188	811
42	100.0 %	1,999	54.6 %	1,091	908
49	100.0 %	1,999	18.3 %	365	1,634
56	100.0 %	1,999	1.1 %	21	1,978

**FIG. 7B**

S/N = - 5 dB

LEGEND: A = NO. OF DETECTED TCH FRAMES  
B = NO. OF DETECTED FACCH FRAMES

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
7	14.6 %	292	100.0 %	1,999	1,707
14	49.9 %	998	99.9 %	1,998	1,000
21	82.4 %	1,648	99.8 %	1,996	348
22	85.8 %	1,715	99.8 %	1,995	280
23	88.5 %	1,769	99.6 %	1,992	223
24	91.2 %	1,823	99.4 %	1,987	164
25	93.0 %	1,860	99.0 %	1,980	120
26	94.4 %	1,887	98.9 %	1,977	90
27	95.9 %	1,917	98.5 %	1,970	53
28	96.6 %	1,932	98.1 %	1,961	29
* 29	97.4 %	1,947	97.2 %	1,944	3
30	98.2 %	1,963	96.2 %	1,923	40
31	98.7 %	1,974	95.1 %	1,901	73
32	98.9 %	1,977	93.7 %	1,874	103
33	99.2 %	1,984	92.2 %	1,843	141
34	99.4 %	1,988	90.6 %	1,811	177
35	99.6 %	1,992	87.9 %	1,758	234
36	99.8 %	1,996	84.9 %	1,698	298
37	99.9 %	1,997	82.4 %	1,648	349
38	99.9 %	1,997	80.1 %	1,601	396
39	99.9 %	1,997	75.9 %	1,518	479
40	99.9 %	1,998	71.2 %	1,424	574
41	100.0 %	1,999	66.7 %	1,334	665
42	100.0 %	1,999	61.7 %	1,233	766
49	100.0 %	1,999	23.0 %	460	1,539
56	100.0 %	1,999	1.2 %	23	1,976

**FIG. 7C**

S/N = -4 dB

LEGEND: A = NO. OF DETECTED TCH FRAMES  
B = NO. OF DETECTED FACCH FRAMES

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
7	20.7 %	413	100.0 %	1,999	1,586
14	63.5 %	1,269	100.0 %	1,999	730
21	91.0 %	1,820	99.9 %	1,997	177
22	93.4 %	1,867	99.9 %	1,997	130
23	97.0 %	1,904	99.8 %	1,996	92
24	96.4 %	1,928	99.7 %	1,994	66
25	97.1 %	1,942	99.7 %	1,994	52
26	97.9 %	1,957	99.5 %	1,990	33
27	98.5 %	1,970	99.3 %	1,985	15
* 28	90.0 %	1,980	98.9 %	1,977	3
29	99.2 %	1,984	98.5 %	1,970	14
30	99.5 %	1,990	97.9 %	1,957	33
31	99.7 %	1,993	97.2 %	1,943	50
32	99.8 %	1,995	96.5 %	1,929	66
33	99.8 %	1,996	95.2 %	1,903	93
34	99.9 %	1,998	93.8 %	1,876	122
35	99.9 %	1,998	92.1 %	1,841	157
36	99.9 %	1,998	90.3 %	1,806	192
37	99.9 %	1,998	87.7 %	1,753	245
38	100.0 %	1,999	84.5 %	1,690	309
39	100.0 %	1,999	81.5 %	1,630	369
40	100.0 %	1,999	78.5 %	1,570	429
41	100.0 %	1,999	74.3 %	1,485	514
42	100.0 %	1,999	68.5 %	1,369	630
49	100.0 %	1,999	21.4 %	568	1,431
56	100.0 %	1,999	1.3 %	25	1,974

**FIG. 7D**

S/N = - 3 dB

LEGEND: A = NO. OF DETECTED TCH FRAMES  
B = NO. OF DETECTED FACCH FRAMES

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
7	26.2 %	524	100.0 %	1,999	1,475
14	71.2 %	1,424	100.0 %	1,999	575
21	95.0 %	1,899	100.0 %	1,999	100
22	96.3 %	1,926	99.9 %	1,998	72
23	97.1 %	1,941	99.9 %	1,997	56
24	98.2 %	1,964	99.9 %	1,997	33
25	98.6 %	1,971	99.9 %	1,997	26
26	99.1 %	1,982	99.8 %	1,995	13
27	99.4 %	1,987	99.7 %	1,994	7
* 28	99.6 %	1,991	99.6 %	1,992	1
29	99.6 %	1,992	99.4 %	1,988	4
30	99.8 %	1,995	99.1 %	1,981	14
31	99.8 %	1,996	98.6 %	1,971	25
32	99.9 %	1,997	98.0 %	1,959	38
33	99.9 %	1,998	97.5 %	1,950	48
34	99.9 %	1,998	96.8 %	1,936	62
35	100.0 %	1,999	95.8 %	1,915	84
36	100.0 %	1,999	94.2 %	1,883	116
37	100.0 %	1,999	92.1 %	1,841	158
38	100.0 %	1,999	89.3 %	1,785	214
39	100.0 %	1,999	86.7 %	1,733	266
40	100.0 %	1,999	83.9 %	1,678	321
41	100.0 %	1,999	80.8 %	1,615	384
42	100.0 %	1,999	76.7 %	1,534	465
49	100.0 %	1,999	34.4 %	687	1,312
56	100.0 %	1,999	1.4 %	28	1,971

**FIG. 7E**

S/N = -2 dB

LEGEND: A = NO. OF DETECTED TCH FRAMES  
B = NO. OF DETECTED FACCH FRAMES

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
7	33.2 %	664	100.0 %	1,999	1,335
14	79.3 %	1,586	100.0 %	1,999	413
21	97.4 %	1,948	100.0 %	1,999	51
22	98.4 %	1,967	100.0 %	1,998	32
23	99.0 %	1,979	100.0 %	1,997	20
24	99.4 %	1,987	100.0 %	1,997	12
25	99.5 %	1,990	99.9 %	1,997	8
26	99.6 %	1,991	99.9 %	1,995	7
27	99.7 %	1,993	99.9 %	1,994	5
* 28	99.7 %	1,994	99.8 %	1,992	3
* 29	99.9 %	1,998	99.4 %	1,988	3
30	99.9 %	1,998	99.6 %	1,992	6
31	99.9 %	1,999	99.4 %	1,987	11
32	100.0 %	1,999	99.2 %	1,984	15
33	100.0 %	1,999	98.8 %	1,976	23
34	100.0 %	1,999	98.3 %	1,965	34
35	100.0 %	1,999	97.7 %	1,953	46
36	100.0 %	1,999	96.7 %	1,933	66
37	100.0 %	1,999	96.1 %	1,921	78
38	100.0 %	1,999	94.5 %	1,889	110
39	100.0 %	1,999	91.9 %	1,838	161
40	100.0 %	1,999	89.5 %	1,789	210
41	100.0 %	1,999	86.5 %	1,730	269
42	100.0 %	1,999	83.3 %	1,666	333
49	100.0 %	1,999	41.0 %	819	1,180
56	100.0 %	1,999	1.9 %	37	1,962

**FIG. 7F**

S/N = -1 dB

LEGEND: A = NO. OF DETECTED TCH FRAMES

B = NO. OF DETECTED FACCH FRAMES

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
7	40.4 %	808	100.0 %	1,999	1,191
14	86.1 %	1,721	100.0 %	1,999	278
21	99.0 %	1,979	100.0 %	1,999	20
22	99.4 %	1,987	100.0 %	1,999	12
23	99.5 %	1,989	100.0 %	1,999	10
24	99.7 %	1,993	100.0 %	1,999	6
25	99.8 %	1,996	100.0 %	1,999	3
26	99.9 %	1,998	100.0 %	1,999	1
* 27	100.0 %	1,999	100.0 %	1,999	0
* 28	100.0 %	1,999	100.0 %	1,999	0
29	100.0 %	1,999	99.9 %	1,998	1
30	100.0 %	1,999	99.9 %	1,998	1
31	100.0 %	1,999	99.8 %	1,996	3
32	100.0 %	1,999	99.7 %	1,994	5
33	100.0 %	1,999	99.4 %	1,988	11
34	100.0 %	1,999	99.4 %	1,987	12
35	100.0 %	1,999	99.0 %	1,979	20
36	100.0 %	1,999	98.6 %	1,972	27
37	100.0 %	1,999	98.0 %	1,959	40
38	100.0 %	1,999	97.2 %	1,944	55
39	100.0 %	1,999	95.8 %	1,916	83
40	100.0 %	1,999	94.3 %	1,885	114
41	100.0 %	1,999	92.2 %	1,844	155
42	100.0 %	1,999	89.2 %	1,783	216
49	100.0 %	1,999	48.6 %	972	1,027
56	100.0 %	1,999	2.5 %	49	1,950



**FIG. 7G**

S/N = 0 dB


LEGEND: A = NO. OF DETECTED TCH FRAMES  
B = NO. OF DETECTED FACCH FRAMES

THRESHOLD	TCH		FACCH		IA - BI
	%	A	%	B	
7	49.0 %	980	100.0 %	1,999	1,019
14	92.2 %	1,844	100.0 %	1,999	155
21	99.5 %	1,990	100.0 %	1,999	9
22	99.7 %	1,993	100.0 %	1,999	6
23	99.9 %	1,998	100.0 %	1,999	1
24	99.9 %	1,998	100.0 %	1,999	1
25	99.9 %	1,998	100.0 %	1,999	1
26	99.9 %	1,998	100.0 %	1,999	1
* 27	100.0 %	1,999	100.0 %	1,999	0
* 28	100.0 %	1,999	100.0 %	1,999	0
* 29	100.0 %	1,999	100.0 %	1,999	0
* 30	100.0 %	1,999	100.0 %	1,999	0
* 31	100.0 %	1,999	100.0 %	1,999	0
32	100.0 %	1,999)	99.7 %	1,998	1
33	100.0 %	1,999)	99.4 %	1,998	1
34	100.0 %	1,999	99.4 %	1,996	3
35	100.0 %	1,999	99.0 %	1,993	6
36	100.0 %	1,999	98.6 %	1,989	10
37	100.0 %	1,999	98.0 %	1,982	17
38	100.0 %	1,999	97.2 %	1,972	27
39	100.0 %	1,999	95.8 %	1,956	43
40	100.0 %	1,999	94.3 %	1,941	58
41	100.0 %	1,999	92.2 %	1,919	80
42	100.0 %	1,999	94.1 %	1,882	117
49	100.0 %	1,999	57.2 %	1,143	856
56	100.0 %	1,999	3.1 %	61	1,938

FIG. 8

S/N (dB)	INVENTION						PRIOR ART					
	THRES- HOLD	TCH		FACCH		IA - BI	THRES- HOLD	TCH		FACCH		IA - BI
		%	A	%	B			%	A	%	B	
-6	28	96.2 %	1,924	96.3 %	1,926	2	4	89.0 %	1,799	97.1 %	1,941	142
-5	29	97.4 %	1,947	97.2 %	1,944	3	5	97.7 %	1,954	92.0 %	1,839	115
-4	28	99.0 %	1,980	98.9 %	1,977	3	4	95.5 %	1,910	99.2 %	1,983	73
-3	28	99.6 %	1,991	99.6 %	1,992	1	4	97.6 %	1,951	99.7 %	1,993	42
-2	28	99.7 %	1,994	99.9 %	1,997	3	5	99.8 %	1,996	99.8 %	1,995	1
	29	99.9 %	1,998	99.8 %	1,995							
-1	27	100.0 %	1,999	100.0 %	1,999	0	5	99.8 %	1,996	99.4 %	1,987	9
	28	100.0 %	1,999	100.0 %	1,999							
0	27	100.0 %	1,999	100.0 %	1,999	0	5	99.8 %	1,998	99.8 %	1,995	3
	28	100.0 %	1,999	100.0 %	1,999							
	29	100.0 %	1,999	100.0 %	1,999							
	30	100.0 %	1,999	100.0 %	1,999							

LEGEND: A = NUMBER OF DETECTED TCH FRAMES  
B = NUMBER OF DETECTED FACCH FRAMES



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 651 523 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
11.03.1998 Bulletin 1998/11

(51) Int. Cl.<sup>6</sup>: H04B 7/26

(43) Date of publication A2:  
03.05.1995 Bulletin 1995/18

(21) Application number: 94116717.3

(22) Date of filing: 23.10.1994

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 27.10.1993 JP 269206/93

(71) Applicant: NEC CORPORATION  
Tokyo (JP)


(72) Inventor:  
Saegusa, Yashuhiro  
c/o NEC Corporation  
Minato-ku, Tokyo (JP)

(74) Representative:  
Baronetzky, Klaus, Dipl.-Ing. et al  
Patentanwälte  
Dipl.-Ing. R. Splanemann, Dr. B. Reitzner, Dipl.-  
Ing. K. Baronetzky  
Tal 13  
80331 München (DE)

(54) Communication receiver using soft decision to discriminate between a traffic channel frame and a fast associated control channel frame

(57) In a digital cellular communication system, a cell-site station transmits a frame containing a fixed number of burst signals each having stealing flag bits indicating that the frame is a traffic channel (TCH) or a fast associated control channel (FACCH). A mobile station receives delay-dispersed burst signals and equalizes their delay-dispersal effects to produce soft information so that each of the transmitted stealing flag

bit is represented by a multibit value. A channel discriminator provides a total sum of all the multibit values of the received burst signals and compares the sum to a threshold value to identify the received frame as a FACCH if the sum is equal to or greater than the threshold value, or identify it as a TCH if the sum is smaller than the threshold value.

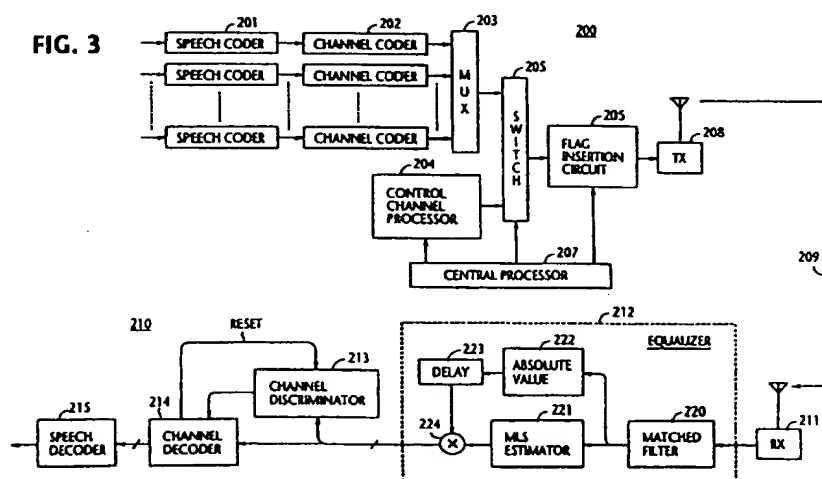

**THIS PAGE BLANK (USPTO)**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 94 11 6717

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	GB 2 260 245 A (TECHNOPHONE LTD) * abstract * * page 3, line 5 - page 6, line 2 * * page 7, line 13 - page 13, line 11 * * figures 1,4,5 * ---	1,3,5	H04B7/26
A	US 4 302 845 A (MCCLAUGHRY MICHAEL J ET AL) * abstract * * column 1, line 60 - column 2, line 59 * * column 4, line 11 - line 24 * * column 5, line 46 - column 7, line 42 * * figures 1-4 * ---	2,4,6	
A	GB 2 259 633 A (ERICSSON TELEFON AB L M) * abstract * * figure 7 * -----	1,3,5	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04B H04Q H04L H03M
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 6 January 1998	Examiner Baas, G
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C01)

**THIS PAGE BLANK (USPTO)**